

VGM761 Single Seals Standard Mechanical Seals - Metal Bellows Seals



Product Description

1. Single seal configuration
2. Balanced design
3. Independent of direction of rotation
4. Stationary metal bellows design

Technical Features

1. Suitable for high temperature application
2. Can handle high sliding velocities
3. No elastomer secondary seals
4. Rugged design for long operating life
5. Bellows design efficiently ensure self-cleaning

Typical Industrial Applications

Chemical industry
High sliding velocities
Hot media
Power plant technology
Refining technology

Materials

Bellows: Inconel® 718 (M6), Hastelloy® C-276 (M5)
Seal face: Carbon graphite antimony impregnated (A), Silicon carbide (Q12)
Seat: Silicon carbide (Q1), Special cast CrMo steel (S)
Metal parts: Duplex (G1), Carpenter® 42 (T4), Hastelloy® C-4 (M)


Performance Capabilities

Sizes: $d_1 =$ Upto 100 mm (Upto 4.000")
Externally pressurized: $p_1 = 25$ bar (363 PSI), (higher pressure possible, please inquire)
Internally pressurized:
 $p_1 < 120$ °C (248 °F) 10 bar (145 PSI),
 $p_1 < 220$ °C (428 °F) 5 bar (72 PSI),
 $p_1 < 400$ °C (752 °F) 3 bar (44 PSI)
Stationary seat lock necessary.
Temperature: $t = -20$ °C...+ 400°C (- 4°F...+ 752°F)
Speed: = 50 m/s (165 ft/s)

Design Variations

UFL690

Shaft diameter: $d_1 =$ Upto 100 mm (Upto 4.000"), (>100 mm on request)
Internally pressurized: $p_1 = 16$ bar (232 PSI), (higher pressure possible, please enquire)
Externally pressurized: $p_1 = 10$ bar (145 PSI), stationary seat lock necessary.
Temperature: $t = -20$ °C...+ 400°C (- 4°F...+ 752°F)
Speed = 50 m/s (165 ft/s)

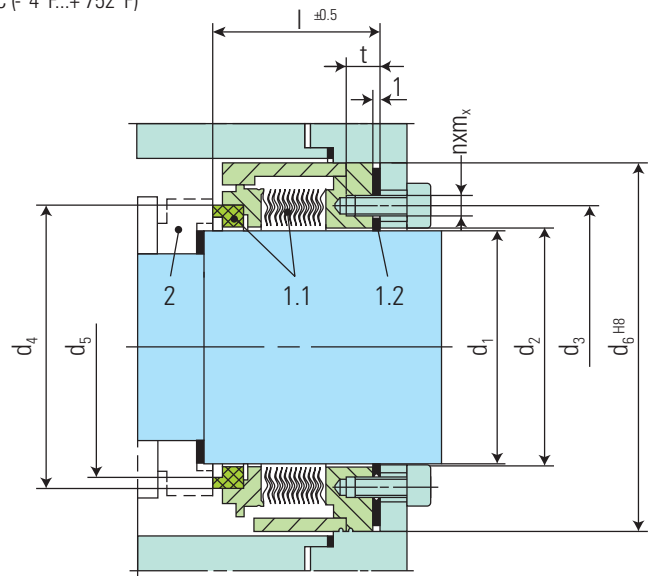

Note: The item numbers as depicted above are based on our technical experience and knowledge and are placed in the chronological order of their assembly procedure.

Dimensional Data

Dimensions in millimeter

d	d ₁	d ₂	d ₃	d ₄	d ₅	d ₆	l	nxmx	t
19	16-19	20.5	29	30.3	25.3	45.0	33.5	4xM4	6
24	20-24	25.5	35	38.8	33.8	49.0	33.5	4xM4	6
30	25-30	31.5	40	43.6	38.6	55.0	34.5	6xM4	6
35	31-35	36.0	45	45.8	40.8	59.0	33.0	6xM4	6
40	36-40	41.0	50	51.5	46.5	65.0	30.5	6xM4	6
45	41-45	46.0	55	55.2	50.2	69.0	35.5	6xM4	6
51	46-51	52.0	63	64.7	59.7	76.5	40.5	6xM5	7
60	52-60	61.0	70	70.6	65.6	84.0	32.0	6xM5	7
70	61-70	71.0	80	82.8	76.8	95.0	38.0	6xM5	7
82	71-82	83.5	95	98.0	92.0	112.0	41.0	6xM6	7
88	83-88	89.5	100	107.7	101.7	120.0	47.0	6xM6	7
100	89-100	101.0	112	112.7	106.7	130.0	47.0	6xM6	7

Item	Part no.	Description
1.1	472/481	Seal face with bellows unit
1.2	400.1	Flat gasket
2	475	Seat
DIN 24250		

inch size available from size 0.625 to 4.000

Note: Additional technical & dimensional information will be provided on request.